



BLUE DYNAMIC

Key benefits



Engineered to the highest German standards



Patented PowerFrame® grid for reliable starting power, fast recharge and corrosion resistance



Meets all original criteria of the car manufacturer

- For all cars with standard equipment
- Up to 25% higher starting power than Black

For more information visit www.varta-automotive.com


ORDER INFORMATION

European Type No. (ETN):	560 408 054
Article Number:	560 408 054 313 2
Short Code:	D24
Barcode:	4016987119501
UK Code:	027
Packaging Unit:	1
Quantity per Pallet:	63

TECHNICAL INFORMATION

Voltage [V]:	12	Base Hold-down:	B13
Battery Capacity [Ah]:	60	Layout:	0
Cold Cranking Amps (CCA), EN [A]:	540	Terminal Types:	1
Length [mm]:	242	Case Size:	H5/LN2
Width [mm]:	175	Weight filled (kg):	15,00
Height [mm]:	190		

DRAWINGS



POWERFRAME® - TECHNOLOGY



Structurally strong


Built for strength, PowerFrame patented grid technology is up to 66% more durable and more corrosion resistant than other grid designs.

Patterned for power

The PowerFrame grid design provides superior cranking power with up to 70% better electrical flow than other grid technologies.

Clean construction

The PowerFrame grid design provides superior cranking power with up to 70% better electrical flow than other grid technologies.

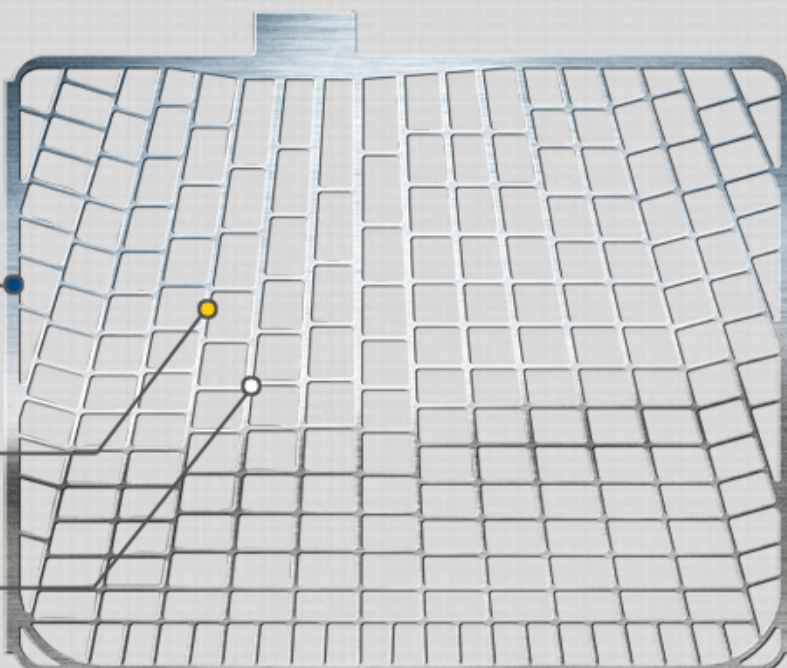

	SILVER Dynamic	BLUE Dynamic	BLACK Dynamic
Number of battery types	11 types	25 types	13 types
Primary function	Engine start	Engine start	Engine start
Cold cranking power	CCA 122%*	CCA 110%*	CCA 100%*
Battery technology	Flooded/SLI*	Flooded/SLI	Flooded/SLI
Positive grid/ Negative grid	PowerFrame® / Expanded	PowerFrame® / Expanded	PowerFrame® / Expanded
OE quality	Exceeds OE requirements	Meets original equipment	Meets original equipment

*Compared to conventional batteries